

Non-Insulated Push-Ons



Female



Male

Female Part No.	Wire Range	Tab Size	Male Part No.
A2FBOS	22-18	1/8"	A2MBC
A3FBC	22-18	3/16"	A3MBC
A4FBC	22-18	1/4"	A4MBC
B2FBC	16-14	1/8"	B2MBC
B3FBC	16-14	3/16"	B3MBC
B4FBC	16-14	1/4"	B4MBC
C4FBC	16-12	1/4"	C4MBC
D4FBC	12-10	1/4"	N/A
D6FBC	12-10	3/8"	N/A

Insulated Push-Ons



Female



Male

Vinyl Insulated

Female Part No.	Wire Range	Tab Size	Male Part No.
A2FV	22-18	1/8"	A2MV
A3FV	22-18	3/16"	A3MV
A4FV	22-18	1/4"	A4MV
B2FV	16-14	1/8"	B2MV
B3FV	16-14	3/16"	B3MV
B4FV	16-14	1/4"	B4MV
B5FV	16-14	5/16"	N/A
D4FV	12-10	1/4"	D4MV
D6FV	12-10	3/8"	N/A

Nylon Insulated

Female Part No.	Wire Range	Tab Size	Male Part No.
A2FN	22-18	1/8"	A2MN
A3FN	22-18	3/16"	A3MN
A4FN	22-18	1/4"	A4MN
B2FN	16-14	1/8"	B2MN
B3FN	16-14	3/16"	B3MN
B4FN	16-14	1/4"	B4MN
C4FN	16-12	1/4"	C4MN
D4FN	12-10	1/4"	D4MN

Fully Insulated Quick Disconnects



Fully Insulated Nylon with Insulation Support

Female Part No.	Wire Range	Tab Size	Male Part No.
22-26FNC	26-22	1/8"	N/A
A3FINC	22-18	3/16"	A3MINC
A4FINC	22-18	1/4"	A4MINC
B3FINC	16-14	3/16"	B3MINC
B4FINC	16-14	1/4"	B4MINC
C4FINC	12-10	1/4"	C4MINC

Fully Insulated Nylon


Female Part No.	Wire Range	Tab Size	Male Part No.
A2FNC	22-18	1/8"	N/A
A3FNC	22-18	3/16"	A3MNC
A4FNC	22-18	1/4"	A4MNC
B3FNC	16-14	3/16"	B3MNC
B4FNC	16-14	1/4"	B4MNC
C4FNC	12-10	1/4"	C4MNC
9200FV	22-18	1/4"	9200MV
9300FV	16-14	1/4"	9300MV

Wire Pin Terminals



Part Number	Wire Range	Color
WP2218V	22-18	Red
WP1614V	16-14	Blue
WP1210V	12-10	Yellow


Flag Push-Ons




Insulated Bare

Part Number	Wire Range	Tab Size	Style
173A	22-18	3/16"	Bare
175A	22-18	1/4"	Bare
175B	16-14	1/4"	Bare
A4FNC-RA	22-18	1/4"	Insulated
B4FNC-RA	16-14	1/4"	Insulated

Scotchloks



3M 950 Series




5600 Series




UR/UY Series

Part No.	Wire Range	Color	Description
3M951	22-18 GA	Red	Male Receptacle
3M952	16-14 GA	Blue	Male Receptacle
3M953	12-10 GA	Yellow	Male Receptacle
5601	22-18 GA	Red	Quick splice wire tap
5602	18-14 GA	Blue	Quick splice wire tap
5602W	18-14 GA	White	Quick splice wire tap
5622	12-10 GA	Yellow	Quick splice wire tap
5672	18-14/12-10 Run	Brown	Quick splice wire tap-step down
804	16-14 GA	Blue	Moisture resistant quick splice tap
UR2	19-26 GA	Red	3 Cond. Moisture resistant connector
UY2	19-26 GA	Yellow	2 Cond. Moisture resistant connector


Pigtails



Part No.	Contacts	Wire Size
41	1	16
42	2	16
42HD-10	2	10
43	3	16
44	4	16
45	5	16
45FLAT	5	16
46	6	16
48	8	3-12, 5-16

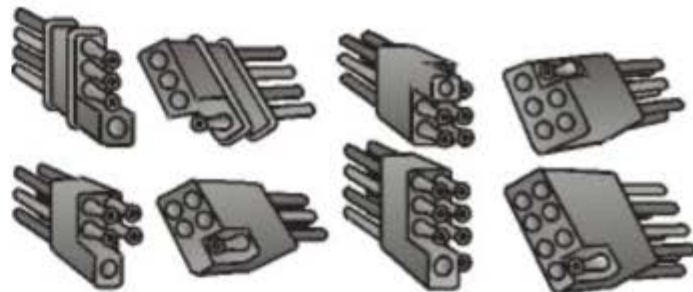

Piggybacks and Adapters



Multi-Stack Disconnects

Part No.	Wire Size	Description
PBT	16-14	1/4" Tab Non-Ins.
PBT-AV	22-18	1/4" Tab Vinyl
PBT-A	22-18	1/4" Tab Nylon
PBT-BV	16-14	1/4" Tab Vinyl
PBT-B	16-14	1/4" Tab Nylon




MMFA



VWA-O



9091



MMFA-CV

Double Male-Female Adapters

Part No.	Tab Size
MMFA-JR	3/16"
MMFA	1/4"
MMFA-CV	1/4"
VWA-O	1/4"
9091	1/4"




Male Push-On Adapters

Part No.	Stud Size	Tab Size
9092A06	6	1/4"
9092A08	8	1/4"
9092A10	10	1/4"
9092A06RN	6	1/4"



250TA9




RCMM

Double Male Adapters

Part No.	Ins.	Tab Size
RCMM	Vinyl	1/4"
250TA9	Bare	1/4"

Bullets and Receptacles



Female

Female Part No.	Female Description	Wire Range	Snap Diam.	Male Description	Male Part No.
91ANC	Nylon Insulated	22-18	.156	Vinyl Insulated	289AX
92ANC	Nylon Insulated	22-18	.180	Vinyl Insulated	279AX
91BNC	Nylon Insulated	16-14	.156	Vinyl Insulated	289BX
92BNC	Nylon Insulated	16-14	.180	Vinyl Insulated	279BX
91AINC	Nylon Ins. w/ins. support	22-18	.156	Nylon Insulated w/support	589A
92AINC	Nylon Ins. w/ins. support	22-18	.180	Nylon Insulated w/support	579A
91BINC	Nylon Ins. w/ins. support	16-14	.156	Nylon Insulated w/support	589B
92BINC	Nylon Ins. w/ins. support	16-14	.180	Nylon Insulated w/support	579B



Male

Trailer Bullets and Receptacles



Female

Female Part No.	Female Description	Wire Range	Male Description	Male Part No.
5623	3M Scotchlok	16-14	3M Nylon Ins. Bullet	NC1614SP



Male